



SwingView[®]
Entry Door




SwingView Entry Door

The SwingView™ Entry Door is the perfect solution for an attractive, secure and low maintenance entry system. The UV resistant vinyl lineals are produced by VEKA Inc., the world's largest producer of vinyl extrusions for window and door systems. The hollow chambered lineals, which act as dead air insulators, are reinforced with aluminum for added strength and rigidity.

Optional Features

- Interior Pinnacle laminates available
- Various glass aesthetics as per end user package
- Screens supplied by others

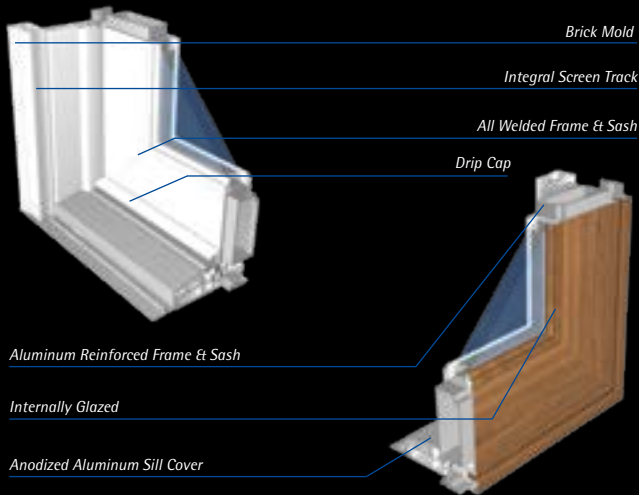

Standard Features

- Available in or out swing
- All welded frame & sash
- Internal weep system
- Standard 5" door panel, 4 9/16" frame
- 3 point, stainless steel locking system with deadbolt
- Brick mold
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- .100" vinyl wall thickness
- Aluminum reinforced frame, sash, astragal & mulls for rigidity
- Anodized aluminum sill cover with integral rolling track for optional sliding screen
- Sash drip cap/hood for water diversion
- Center shootbolts on two-panel french door
- Moveable mullion for french swing door application
- AAMA approved PVC lineal certification, NFRC simulations



Performance Data

Air Infiltration	.07 cfm/ft ²
Water Resistance	7.50 psf outswing LW (limited water)inswing
Uniform Load Structural	+/- 75.0 psf
Clear/Argon	0.50
Low E/Argon	0.39
HGD up to	R-PG50 SHA

Standard Features



Optional brass hardware



The French center shoot bolt




Vinyl sill with aluminum threshold



PVC brick mold


Configurations

Single Panel Swing Door



Left Hand Right Hand

Two Panel Swing Door

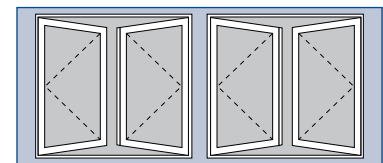


FH-LH

FH-RH


In Swing as viewed from exterior

Two Panel Single Swing Door



JH-OX-RH


JH-XO-LH



CH-OX-LH

CH-XO-RH

In Swing as viewed from exterior



Vinyl Color & Laminate Woodgrains

