

*SlideView*TM
High Performance II Patio Door



SlideView High Performance II

The SlideViewTM patio door is the high performance solution for coastal applications where a DP 65 rating is required. Thick walled, all welded vinyl frame and sash combined with a 1 3/8" glass package and aluminum reinforcing achieves the best ratings for the stringent codes that are being enforced for coastal regions. This door ships KD, complete with all hardware ready for an elegant and efficient glass package. There is no reason to look any further than the SlideViewTM all vinyl sliding door by VEKA.

Optional Features

- Various glass aesthetics as per distributor
- Sliding screens available as per distributor

Performance Data


Air Infiltration	0.10 cfm/ft ²
Water Resistance	9.82 psf
Uniform Load Structural Rating	+/- 97.74 psf
Clear	0.48
Low E	0.41
Low E/Argon	0.39

Standard Features




Color matched hardware Metal glide rollers Aluminum threshold cover Stainless steel Locking hardware

Configurations

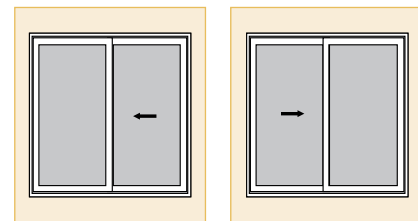

OX

XO

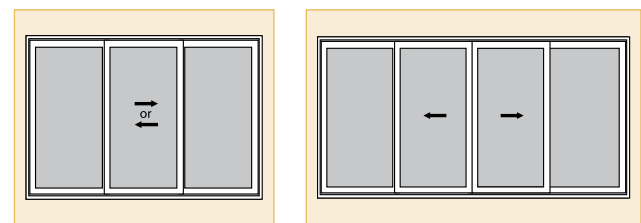


OXO

OXXO

LH → ← RH

LH → ← RH

Vinyl Color

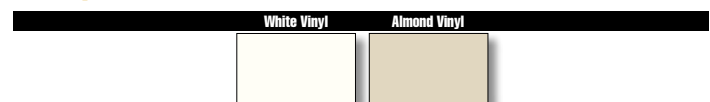

Standard Features

- Dual-point locking hardware
- Welded sash
(individually boxed for shipping)
- Mechanical frame *(boxed for shipping)*
- Colors: White, Almond
- Internal weep system
- Stainless steel adjustable tandem rollers, lock & striker
- Keyed lock cylinder
- XO, OX, OXO, OXXO configurations
- Aluminum reinforcing
- White/Almond hardware finish
- Accommodates 1-1/4" glazing
- Dual seal weatherstripping
- Exterior glazed
- Integral screen track
- Aluminum threshold cover
- Flexible PVC bumpers
- AAMA approved PVC lineal certification
- NFRC simulations

